

RCL314615**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Product image

Similar to illustration

General ordering data

| | |
|------------|--|
| Version | RIDERSERIES RCL, Relay, Number of contacts: 1, CO contact AgNi, Rated control voltage: 115 V AC, Continuous current: 16 A, Plug-in connection, Test button available: No |
| Order No. | 8693890000 |
| Type | RCL314615 |
| GTIN (EAN) | 4032248365357 |
| Qty. | 20 pc(s). |

RCL314615

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|------------|---------|-----------------|------------|
| Depth | 15.7 mm | Depth (inches) | 0.618 inch |
| Height | 29 mm | Height (inches) | 1.142 inch |
| Width | 12.7 mm | Width (inches) | 0.5 inch |
| Net weight | 12.58 g | | |

Temperatures

| | | | |
|---------------------|--|-----------------------|----------------|
| Storage temperature | -40 °C...85 °C | Operating temperature | -40 °C...70 °C |
| Humidity | 40 °C / 93 % rel. humidity, no condensation | | |

Probability of failure

| | |
|-----|----------------------------|
| B10 | 230.000 AC15: 250Vac/3A |
|-----|----------------------------|

Rated data UL

| | |
|-------------------------|---------|
| Certificate No. (cURus) | E224238 |
|-------------------------|---------|

Control side

| | | | |
|-----------------------|---------------|--------------------------------|--------------------|
| Rated control voltage | 115 V AC | Rated current AC | 6.6 mA |
| Power rating | 0.75 VA | Pull-in/drop-out voltage, typ. | 86.3 V / 17.3 V AC |
| Coil resistance | 8100 Ω ± 15 % | Coil tolerance | 15 % |

Load side

| | | | |
|---|--|---|--|
| Rated switching voltage | 250 V AC | Continuous current | 16 A |
| Max. switching frequency at rated load | 0.1 Hz | Inrush current | 30 A / 4 s |
| AC switching capacity (resistive), max. | 4000 VA | DC switching capacity (resistive), max. | 384 W @ 24 V |
| Switch-on delay | ≤ 8 ms | Switch-off delay | ≤ 6 ms |
| Contact type | 1 CO contact (AgNi) | Mechanical service life | AC coil 10 x 10 ⁶ switching cycles, DC coil 30 x 10 ⁶ switching cycles |
| Min. switching power | 1 mA @ 24 V, 10 mA @ 12 V, 100 mA @ 5 V | | |

General data

| | | | |
|-----------------------|-------------|--------------------------------------|-----|
| Test button available | No | Mechanical switch position indicator | No |
| Colour | Transparent | UL 94 flammability rating | V-2 |

Insulation coordination

| | | | |
|---|-----------------------------|-----------------------------------|-----------------------------|
| Rated voltage | 250 V | Pollution severity | 2 |
| Surge voltage category | III | Insulating material group | IIIa |
| Creepage and clearance distance input – output | ≥ 10 mm | Dielectric strength, Input/Output | 5 kV _{eff} / 1 min |
| Dielectric strength of open contact | 1 kV _{eff} / 1 min | Protection degree | IP20 |

Further details of approvals / standards

| | | | |
|-----------------------|--------------------|-------------------------|----------------|
| Standards | IEC 61810-1, UL508 | Certificate No. (CSA) | 249409-2426937 |
| Certificate No. (VDE) | 40020589 | Certificate No. (cURus) | E224238 |

Creation date October 3, 2022 6:47:39 PM CEST

RCL314615**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.comwww.weidmueller.com**Technical data****Connection data**

| | | | |
|------------------------|--------------------|-----------------|---------|
| Wire connection method | Plug-in connection | Pitch in mm (P) | 5.00 mm |
|------------------------|--------------------|-----------------|---------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001437 | ETIM 7.0 | EC001437 |
| ETIM 8.0 | EC001437 | ECLASS 9.0 | 27-37-16-01 |
| ECLASS 9.1 | 27-37-16-01 | ECLASS 10.0 | 27-37-16-01 |
| ECLASS 11.0 | 27-37-16-01 | ECLASS 12.0 | 27-37-16-01 |

Approvals

Approvals



| | |
|-------------------------|------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate No. (cURus) | E224238 |

Downloads

| | |
|------------------|--|
| Engineering Data | CAD data – STEP |
| Engineering Data | EPLAN, WSCAD |
| Catalogues | Catalogues in PDF-format |

RCL314615

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com


Drawings

Wiring diagram

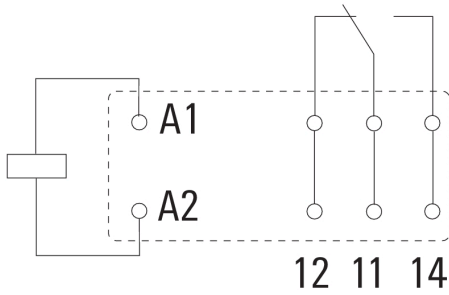


View of Pins from below



Graph

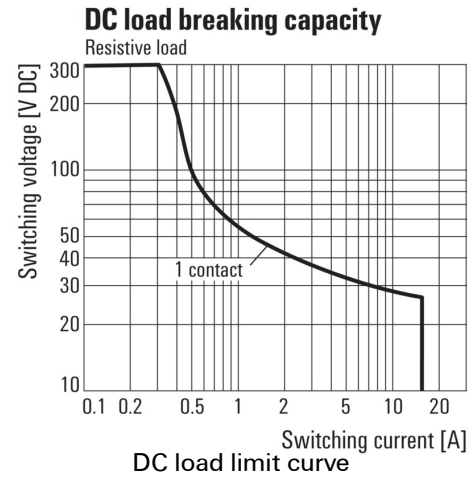

Graph

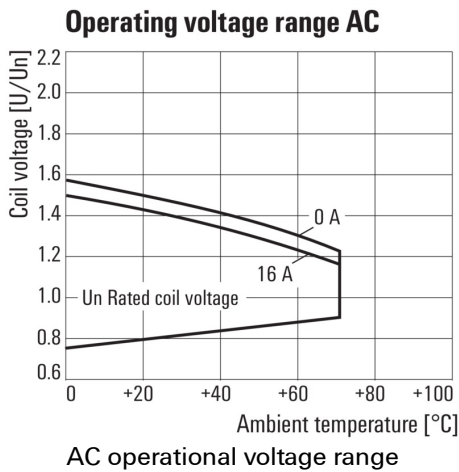

Graph

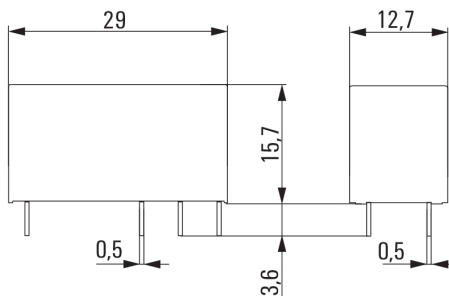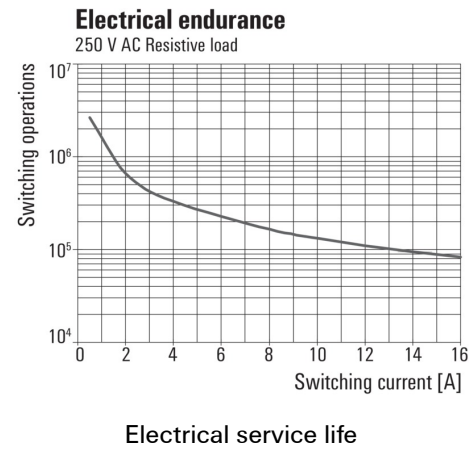

RCL314615

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0


Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Drawings

Miscellaneous

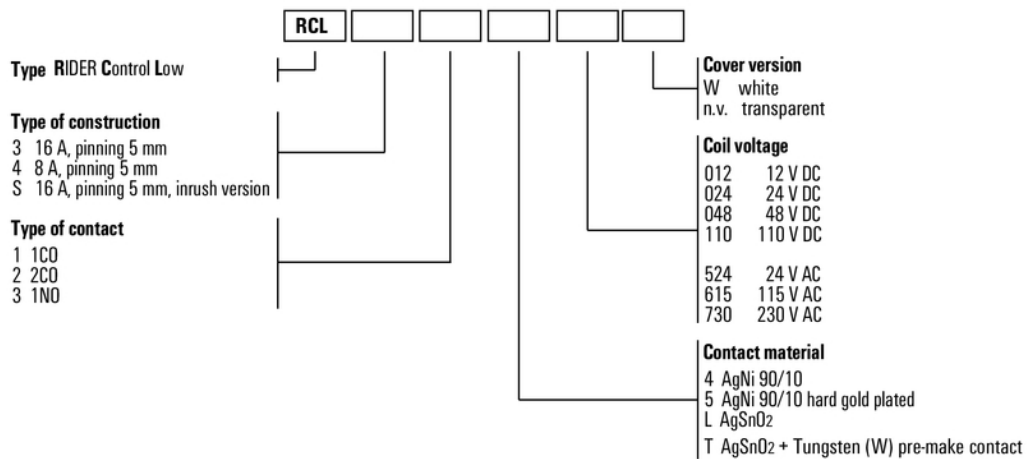

Type codes