

KDKS1LD/24 GFH DDECK FUSE TERM

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Product image

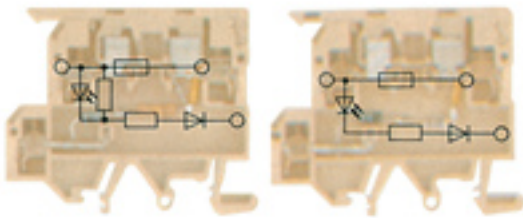

Similar to illustration

In some applications it is useful to protect the feed through connection with a separate fuse. Fuse terminal blocks are made up of one terminal block bottom section with a fuse insertion carrier. The fuses vary from pivoting fuse levers and pluggable fuse holders to screwable closures and flat plug-in fuses.

General ordering data

Version	SAK Series, Fuse terminal, Rated cross-section: 4 mm ² , Direct mounting
Order No.	9802730000
Type	KDKS1LD/24 GFH DDECK FUSE TERM
GTIN (EAN)	4008190564001
Qty.	25 pc(s).

KDKS1LD/24 GFH DDECK FUSE TERM

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	55.5 mm	Depth (inches)	2.185 inch
Height	62.75 mm	Height (inches)	2.47 inch
Width	8 mm	Width (inches)	0.315 inch
Net weight	22.68 g		

Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

Material data

Material	PA 66	UL 94 flammability rating	V-2
----------	-------	---------------------------	-----

System specifications

Version	Screw connection, Fuse cartridge, with LED, One end without connector	Number of levels	2
Number of clamping points per level	2	Levels cross-connected internally	No
PE connection	No	Rail	TS 35, TS 32

Additional technical data

Installation advice	Direct mounting	Type of mounting	Snap-on
---------------------	-----------------	------------------	---------

Conductors for clamping (rated connection)

Number of connections	3
-----------------------	---

General

Installation advice	Direct mounting	Rail	TS 35, TS 32
---------------------	-----------------	------	--------------

Rating data

Rated cross-section	4 mm ²	Power loss in accordance with IEC 60947-7-x	1.02 W
---------------------	-------------------	---	--------

Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
ETIM 8.0	EC000899	ECLASS 9.0	27-14-11-16
ECLASS 9.1	27-14-11-16	ECLASS 10.0	27-14-11-16
ECLASS 11.0	27-14-11-16	ECLASS 12.0	27-14-11-16

Approvals

Approvals



ROHS Conform

Creation date October 3, 2022 6:48:39 PM CEST

Catalogue status 23.09.2022 / We reserve the right to make technical changes.

KDKS1LD/24 GFH DDECK FUSE TERM**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.comwww.weidmueller.com**Technical data****Downloads**Approval/Certificate/Document of
Conformity[EAC certificate](#)
[Declaration of Conformity](#)
[CE Declaration of Conformity all terminals](#)

User Documentation

[StorageConditionsTerminalBlocks](#)

Catalogues

[Catalogues in PDF-format](#)