

## AP RF 80 LI 2025

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030


32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

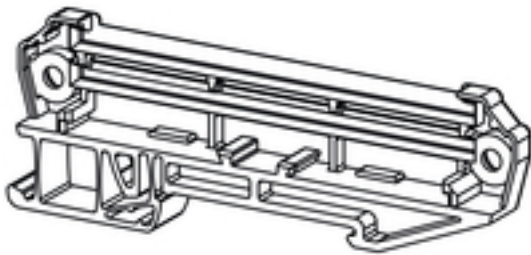

### Flexible - More flexible - Profilform

Modular housings in profile form - the flexible modular system comprising coloured and transparent plastic profiles and carrier modules

The combination of standard pitches mounted side by side in any arrangement and metre goods cut accurate to the millimetre creates the perfect balance between flexibility and economic efficiency:

- Pitch profiles with standard widths ranging from 5mm to 45mm allow the mounting of all standard PCB formats.
- Variable heights ensure maximum component density, even with larger electronics components.
- The different installation variations mean that mounting the enclosure directly is as easy as clipping components onto the terminal rail
- Solid hoods protect the module reliably from external influences

The recipe for success: variable profile + modular form components = flexible enclosure concept that offers a large surface area for the PCBs.

The modular concept is designed for modules with high space requirements and suitable for small component quantities and different widths.

### General ordering data

|            |  |
|------------|--|
| Version    | End plate, RS 80 Pebble grey, End plate, Width: 9 mm |
| Order No.  | <a href="#">8156210000</a>                           |
| Type       | AP RF 80 LI 2025                                     |
| GTIN (EAN) | 4008190978198  |
| Qty.       | 20 pc(s).  |

## AP RF 80 LI 2025

Weidmüller Interfaces GmbH &amp; Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |        |                 |            |
|------------|--------|-----------------|------------|
| Height     | 30 mm  | Height (inches) | 1.181 inch |
| Width      | 9 mm   | Width (inches)  | 0.354 inch |
| Net weight | 5.95 g |                 |            |

## General data

|                      |             |                        |                         |
|----------------------|-------------|------------------------|-------------------------|
| Colour               | Pebble grey | Colour chart (similar) | RAL 7032                |
| Encapsulation option | No          | Protection degree      | IP20 in installed state |

## Material data

|                                  |           |                     |       |
|----------------------------------|-----------|---------------------|-------|
| Comparative Tracking Index (CTI) | 600 ≤ CTI | Insulating material | PA 66 |
| UL 94 flammability rating        | V-2       |                     |       |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001031    | ETIM 7.0    | EC001031    |
| ETIM 8.0    | EC001031    | ECLASS 9.0  | 27-18-27-90 |
| ECLASS 9.1  | 27-18-27-90 | ECLASS 10.0 | 27-18-27-92 |
| ECLASS 11.0 | 27-18-27-92 | ECLASS 12.0 | 27-18-27-92 |

## Approvals

Approvals



ROHS Conform

## Downloads

|                  |   |
|------------------|---|
| Engineering Data | <a href="#">CAD data – STEP</a>   |
| Engineering Data | <a href="#">EPLAN</a>   |
| Catalogues       | <a href="#">Catalogues in PDF-format</a>  |
| Brochures        | <a href="#">FL ANALO.SIGN.CONV. EN</a><br><a href="#">MB DEVICE MANUF. EN</a><br><a href="#">FL MACHINE SAFETY EN</a><br><a href="#">FL 72H SAMPLE SER EN</a><br><a href="#">PO OMNIMATE EN</a><br><a href="#">PO OMNIMATE EN</a> |

## AP RF 80 LI 2025

**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

## Drawings

RAIL MOUNTING  
WITH LOCKING FOOT

