

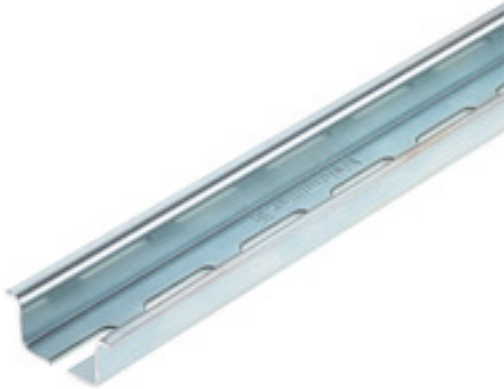
TS 35X15/5X18 2M/ST/SZ**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Similar to illustration

Steel DIN rails are the most widespread on the market. Among metal DIN rails, they have the lowest shortcircuit protection, similar to stainless steel.

General ordering data

Version	Rail, TS 35, TS 35 x 15, with slot, Steel, galvanic zinc plated and passivated
Order No.	1879100000
Type	TS 35X15/5X18 2M/ST/SZ
GTIN (EAN)	4032248473793
Qty.	2 m

Creation date October 3, 2022 6:44:58 PM CEST

Catalogue status 23.09.2022 / We reserve the right to make technical changes.

TS 35X15/5X18 2M/ST/SZ

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	15 mm	Depth (inches)	0.591 inch
Height	35 mm	Height (inches)	1.378 inch
Width	2,000 mm	Width (inches)	78.74 inch
Net weight	620 g		

Mounting rail

Installation advice	Direct mounting		
Length of the terminal rail	min.	0 mm	
	max.	2,000 mm	
	nominal	2,000 mm	
Material	Steel		
Pre-punched mounting rail	Yes		
Short circuit strength corresponds to E-Cu wire	50 mm ²		
Short-time withstand current according to IEC 60947-7-2	6 kA/1s		
Slit gap	7 mm		
Slit gap			
Slit length	18 mm		
Slit length			
Slit width	5.2 mm		
Slit width			
Standards	In accordance with DIN EN 60715		
Surface finish	galvanic zinc plated and passivated		

Classifications

ETIM 6.0	EC001285	ETIM 7.0	EC001285
ETIM 8.0	EC001285	ECLASS 9.0	27-40-06-02
ECLASS 9.1	27-40-06-02	ECLASS 10.0	27-40-06-02
ECLASS 11.0	27-40-06-02	ECLASS 12.0	27-40-06-02

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	EPLAN, WSCAD
User Documentation	StorageConditionsTerminalBlocks
Catalogues	Catalogues in PDF-format