

## ACT20X-2SAI-2HAO-S

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

### Product image, Similar to illustration



The ACT20X-SAI-HAO/2SAI-2HAO current output isolators are suitable for controlling field devices in Ex areas, up to Zone 0.

The input/output-side HART protocol transparent signal connection is implemented using 4 to 20 mA current loops.

Integrated alarm contacts issue an alert in the event of a malfunction; this makes troubleshooting easier and increases system availability.

The rail-mounted current output isolators are optionally available in one- or two-channel versions.

With 11 mm width per channel, the devices need little space in the electrical cabinet.

### General ordering data

Version	EX signal isolating converter, Safe-input: 4-20mA, Ex output: 4 - 20 mA, 2-channel
Order No.	<a href="#">8965460000</a>
Type	ACT20X-2SAI-2HAO-S
GTIN (EAN)	4032248785070
Qty.	1 pc(s).

**ACT20X-2SAI-2HAO-S**

Weidmüller Interfaces GmbH &amp; Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	113.6 mm	Depth (inches)	4.472 inch
Height	119.2 mm	Height (inches)	4.693 inch
Width	22.5 mm	Width (inches)	0.886 inch
Net weight	212 g		

**Temperatures**

Storage temperature	-20 °C...85 °C	Operating temperature	-20 °C...60 °C
Humidity	0...95 % (no condensation)		

**Probability of failure**

SIL PAPER	SIL certificate	SIL in compliance with IEC 61508	2
MTBF	135 Years		

**Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1	SCIP	2f6dd957-421a-46db-a0c2-cf1609156924
------------	----------------	------	--------------------------------------

**Input**

Input current	4...20mA	Input frequency	0.5...2.5 kHz @ 3.5...23 mA bi-directional HART <sup>®</sup> signal
Number of inputs	2	Voltage drop	< 2 V

**Output**

2-wire supply	> 14.5 V @ 20 mA	Cut-off frequency (-3 dB)	0.5...2.5 kHz @ 3.5...23 mA bi-directional HART <sup>®</sup> signal
Influence of load resistance	≤ 0.01% of span / 100 Ω	Load impedance current	≤ 725 Ω
Output current	4...20 mA (max. 23 mA)	Output signal limit	< 28 mA
Residual ripple (current loop)	< 7.5 mV <sub>eff</sub>	Type	intrinsically safe circuit

**Alarm output**

Alarm function	Signal limit exceeded, Line interruption at the input, No supply voltage, Device error	Continuous current	≤ 0.5 A AC / 0.3 A DC (safe zone), ≤ 0.5 A AC / 1 A DC (zone 2)
Hysteresis	0.1 mA (switching threshold)	Nominal switching voltage	≤ 125 V AC / 110 V DC (safe area) ≤ 32 V AC / 32 V DC (zone 2)
Power rating	≤ 62.5 VA / 32 W (safe area) ≤ 16 VA / 32 W (Zone 2)	Switching thresholds	0...29.9 mA (programmable)
Type	Status relay, 1 NC (voltage-free)		

**ACT20X-2SAI-2HAO-S**

Weidmüller Interfaces GmbH &amp; Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com With FDT/DTM software

Power consumption ≤ 1.8 W

Step response time ≤ 5 ms

Voltage supply 19.2...31.2 V DC

**Technical data****General specifications**

Accuracy	< 0.1% span	Configuration	www.weidmueller.com
Humidity	0...95 % (no condensation)	Power consumption	≤ 1.8 W
Protection degree	IP20	Step response time	≤ 5 ms
Type of connection	Screw connection	Voltage supply	19.2...31.2 V DC

**Insulation coordination**

EMC standards	DIN EN 61326, NE 21	Insulation voltage	2.6 kV (input / output)
Rated voltage	300 V		

**Data for Ex applications (ATEX)**

Current I <sub>0</sub>	93 mA	Installation location	Device installed in safe area, zone 2
Marking	II (1) G [Ex ia Ga] IIC/IIB/ IIA, II (1) D [Ex ia Da] IIIC, I (M1) [Ex ia Ma] I	Power P <sub>0</sub>	< 650 mW
Voltage U <sub>0</sub>	28 V DC		

**Safety-related basic specifications**

Description of the "safe state"	analogue Output ≤ 3.6 mA or output ≥ 21 mA	Device type	A
T <sub>proof</sub>	5 Years	Total failure rate for safe detected failures (λ <sub>SD</sub> )	0 FIT
Hardware fault tolerance (HFT)	0	Safety category	SIL 2
Safe Failure Fraction (SFF)	85 %	Mean Time To Repair (MTTR)	24 h
Total failure rate for safe undetected failures (λ <sub>SU</sub> )	164 FIT	Total failure rate for dangerous detected failures (λ <sub>DD</sub> )	127 FIT
Total failure rate for dangerous undetected failures (λ <sub>DU</sub> )	48 FIT	Probability of outage PFH	4.8 x 10 <sup>-8</sup> h <sup>-1</sup>
Demand mode	High		

**Safety-related specifications Low demand mode**

Average Probability of Failure on Demand (PFD <sub>avg</sub> )	2.29 x 10 <sup>-4</sup> (T <sub>proof</sub> = 1 year), 4.37 x 10 <sup>-4</sup> (T <sub>proof</sub> = 2 years), 1.06 x 10 <sup>-4</sup> (T <sub>proof</sub> = 5 year)
--	--

**Connection data**

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm <sup>2</sup>
Clamping range, min.	0.25 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 12

**Guarantee**

Time interval	3 years
---------------	---------

**ACT20X-2SAI-2HAO-S****Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

[info@weidmueller.com](mailto:info@weidmueller.com)**Technical data**[www.weidmueller.com](http://www.weidmueller.com)**Classifications**

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ECLASS 9.0	27-21-01-20
ECLASS 9.1	27-21-01-20	ECLASS 10.0	27-21-01-20
ECLASS 11.0	27-21-01-20	ECLASS 12.0	27-21-01-20

**ACT20X-2SAI-2HAO-S**

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

**Technical data**

**Tender specification sheets**

Long specification

Short specification

www.weidmueller.com

**Ex output isolation amplifier for standard DC current signals, 2-channel, HART transparent 2-channel output isolation amplifier in 22.5 mm width with external power supply, for transmitting and isolating standard signals 4 to 20 mA from the safe zone to Ex zones 0,1,2.**

**Status-/ error messages are available via a relay contact (NO).**

The component can be configured using standard FDT/DTM software.

**Add-on housing for TS35 rail mounting Dimensions: L/W/H**

**119.2/ 22.5/ 113.6**

**Screw connection/ Nominal cross-section 2.5 mm<sup>2</sup>**

**Protection degree: IP 20**

**Input 2 x 4...20 mA**

**Output 2 x 4...20 mA**

**Load < 600 Ohm Kanal**

**Accuracy < 0,1 % v.E**

**Temperature coefficient < 0,01% v.E./°C (Tu)**

**Alarm output relay 1 NO contact**

**250 V AC / 30 V DC @ 2A safe zone**

**32 V AC @ 0.5 A/ 32 VDC @ 1 A Zone 2**

**Auxiliary power 19...31.2 V DC**

**Power loss approx. 3 W Ambient**

**temperature range -20 °C...+60 °C**

**Secure isolation EN 61010, 3-way isolation up to 2.6 kV AC/DC of all circuits against each other**

**Working voltage 300 V AC/DC at 50/60 Hz**

**Category II and pollution degree 2**

**Approvals cULus, ATEX**

**ATEX marking II 3 G**

**Ex output isolation amplifier for standard DC current signals, 2-channel, HART transparent 2-channel output isolation amplifier in 22.5 mm width with external power supply,**

**ACT20X-2SAI-2HAO-S**

Weidmüller Interfaces GmbH &amp; Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

[info@weidmueller.com](mailto:info@weidmueller.com)**Technical data****Approvals**

Approvals



Approvals	DNVGL;
ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E337701

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">Certification SIL</a> <a href="#">Certification DNV GL</a> <a href="#">Certification ATEX</a> <a href="#">Certification IECEX</a> <a href="#">Certification UL</a> <a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">CAD data – STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD</a>
Software	<a href="#">Library and function block – WI-Manager, DTM-Library for online installation V.1.2.3</a> <a href="#">Release notes for Weidmueller FDT-DTM Software version 1.2.3.</a>
User Documentation	<a href="#">Instruction sheet</a> <a href="#">Safety Manual for SIL application</a> <a href="#">Handbuch ACT20X- Serie, deutsch</a> <a href="#">Manual ACT20X-series, english</a> <a href="#">20210120 Security Advisory - WI-Manager affected by MundM Software fdtCONTAINER vulnerability</a>
Catalogues	<a href="#">Catalogues in PDF-format</a>
Brochures	

**ACT20X-2SAI-2HAO-S**

**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083


info@weidmueller.com

**Drawings**



**Application**

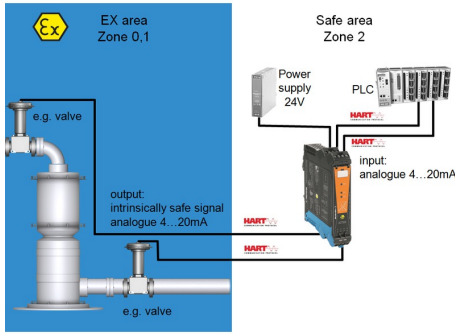


**Block diagram**

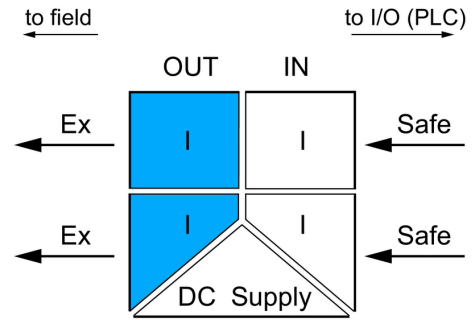

**Dimensioned drawing**

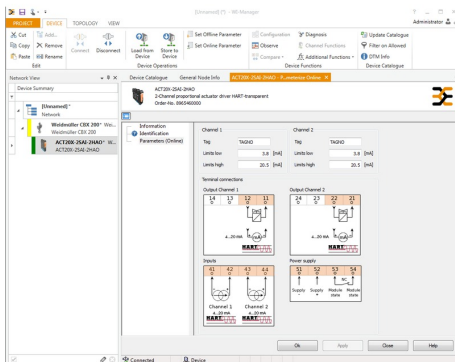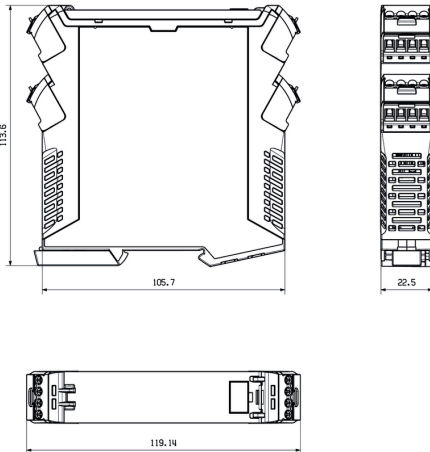

screenshot of configuration with FDT2 / DTM software

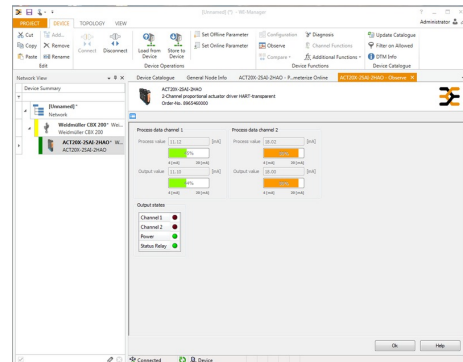

screenshot of "observe" with FDT2 / DTM software

**ACT20X-2SAI-2HAO-S**

**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

**Drawings**

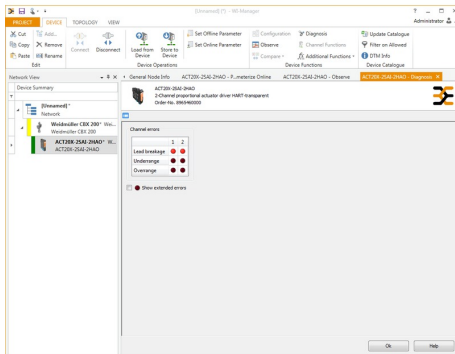

screenshot of "diagnosis" with FDT2 / DTM software

**Connection diagram**

