



### Main

Range Compatibility	Altivar&Nbsp;Process ATV900 Altivar Machine ATV340
Product or Component Type	Braking resistor
Ohmic value	28 Ohm
[Ue] rated operational voltage	24 V DC 250 V AC

### Complementary

Product compatibility	Variable speed drive ATV930 wall mount 11 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 15 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 11 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 15 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 3 kW 200...240 V severe cycle Variable speed drive ATV340 7.5 kW 380...480 V medium cycle Variable speed drive ATV340 11 kW 380...480 V medium cycle Variable speed drive ATV930 15 kW 500...690 V medium cycle Variable speed drive ATV930 18.5 kW 500...690 V medium cycle Variable speed drive ATV930 20 hp 600 V medium cycle Variable speed drive ATV930 25 hp 600 V medium cycle
Braking cycle	Severe cycle heavy duty) <54 s 100 % 120 s Medium cycle normal duty) <4 s 135 % 40 s Medium cycle heavy duty) <4 s 165 % 40 s Severe cycle heavy duty) <6 s 165 % 120 s
Average power available	0.96 kW 122 °F (50 °C)
Electrical connection	Terminal <= 10 mm <sup>2</sup> / AWG 8 drive Terminal <= 2.5 mm <sup>2</sup> / AWG 12 temperature control switch
Protection type	Thermal protection via drive or temperature control switch 120 °C
Width	7.48 in (190 mm)
Height	22.44 in (570 mm)
Depth	7.09 in (180 mm)
Net Weight	9.26 lb(US) (4.2 kg)

### Environment

IP Degree of Protection	IP20
Ambient Air Temperature for Storage	-13...158 °F (-25...70 °C)
Ambient air temperature for operation	32...122 °F (0...50 °C)

### Ordering and shipping details

Category	22209-ATV650
Discount Schedule	CP4E
GTIN	3606480802355
Nbr. of units in pkg.	1
Package weight(Lbs)	10.81 lb(US) (4.902 kg)
Returnability	No
Country of origin	DE

## Packing Units


Unit Type of Package 1	PCE
Package 1 Height	10.04 in (25.5 cm)
Package 1 width	7.87 in (20.0 cm)
Package 1 Length	22.83 in (58.0 cm)
Unit Type of Package 2	P06
Number of Units in Package 2	8
Package 2 Weight	105.20 lb(US) (47.716 kg)
Package 2 Height	19.69 in (50.0 cm)
Package 2 width	31.50 in (80.0 cm)
Package 2 Length	23.62 in (60.0 cm)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

Dimensions

Right Side and Front View

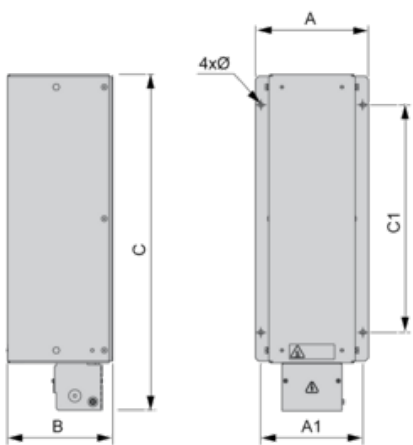

Dimensions in mm

A	B	C	A1	C1	Ø
190	180	570	170	380	6.6 x 9


Dimensions in in.

A	B	C	A1	C1	Ø
7.48	7.09	22.44	6.69	14.96	0.26 x 0.35

Mounting and Clearance



(1) Braking resistor

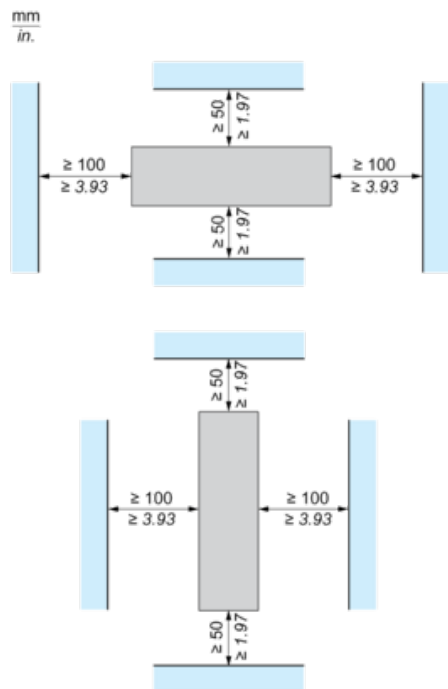


---

Recommended Schema


---

1 Braking Resistor



A1 : Drive or external braking unit  
A2 : Braking resistor  
PA, PB : Bus DC

2 Braking Resistors

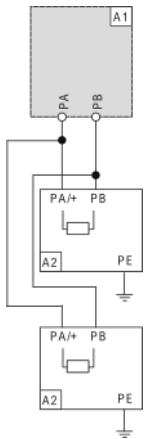

A1 : Drive or external braking unit  
A2 : Braking resistor  
PA, PB : Bus DC