

ACT20P-2CI-2CO-ILP-P

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold


Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Similar to illustration



ACT20P: The flexible solution

- Precise and highly functional signal converters
- Release levers simplify handling

General ordering data

Version	Signal converter/isolator, dual channel, Input current loop feed, Input : 2 x 0(4) - 20 mA, (loop powered), Output : 2 x 0(4) - 20 mA
Order No.	7760054358
Type	ACT20P-2CI-2CO-ILP-P
GTIN (EAN)	4050118559729
Qty.	1 pc(s).

ACT20P-2CI-2CO-ILP-P

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	114 mm	Depth (inches)	4.488 inch
Height	127.1 mm	Height (inches)	5.004 inch
Width	12.5 mm	Width (inches)	0.492 inch
Net weight	140 g		

Temperatures

Operating temperature	-20 °C...60 °C	Humidity	5...95 %, no condensation
-----------------------	----------------	----------	---------------------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1	SCIP	2f6dd957-421a-46db-a0c2-cf1609156924
------------	----------------	------	--------------------------------------

Input

Number of inputs	2	Voltage drop, current input	3.8 V, Approx. 3 V at $R_L = 0 \Omega$; approx. 13 V at $R_L = 500 \Omega$; ($I_{IN} = 20 \text{ mA}$)
------------------	---	-----------------------------	--

Output

Load impedance current	$\leq 600 \Omega$	Number of outputs	2
Output current	0...20 mA (if input: 0...20 mA), 4...20 mA (if input: 4...20 mA)	Type	active, connected control must be passive

General data

Accuracy	$< 0.1 \%$ of end value	Configuration	none
Rail	TS 35	Step response time	$\leq 1 \text{ ms}$
Type of connection	PUSH IN	Voltage supply	Loop powered, via 4...20 mA input

Insulation coordination

EMC standards	EN 61010-1:2011, UL 61010-1, IEC61000-6-2, IEC 61000-6-4	Impulse withstand voltage	4 kV (1.2/50 μs)
Insulation voltage	2 kV inputs / outputs	Rated voltage	300 V

Data for Ex applications (ATEX)

Marking	II 3 G Ex ec IIC T6 Gc
---------	------------------------

ACT20P-2CI-2CO-ILP-P

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

Technical data

info@weidmueller.com

www.weidmueller.com

Connection data

Type of connection	PUSH IN	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 14
Wire cross-section, solid, min.	0.2 mm ²	Wire cross-section, solid, max.	2.5 mm ²
Wire connection cross section, finely stranded, min.	0.5 mm ²	Wire connection cross section, finely stranded, max.	2.5 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	2.5 mm ²

Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
ETIM 8.0	EC002653	ECLASS 9.0	27-21-01-20
ECLASS 9.1	27-21-01-90	ECLASS 10.0	27-21-01-20
ECLASS 11.0	27-21-01-20	ECLASS 12.0	27-21-01-20

Important note

Product information	<p>The ACT20P-2CI-2CO-ILP-S (dual channel) fixed passive isolators isolate analogue standard current source signals. An analogue input current signal is converted linear and galvanic isolated into an analogue output current signal. The device is powered via the input current loop.</p> <p>Features</p> <ul style="list-style-type: none"> Galvanic 4-way isolation (dual-channel device) between all inputs and outputs.
---------------------	--

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURusEX)	E338066
Certificate no. (cULus)	E469563

Downloads

Approval/Certificate/Document of Conformity	ATEX Certification IECEX Certification UL Certification (hazardous location) UL Certification (US-CAN) Declaration of Conformity
Engineering Data	CAD data – STEP
User Documentation	Instruction sheet
Catalogues	Catalogues in PDF-format

Creation date October 3, 2022 6:47:10 PM CEST

Catalogue status 23.09.2022 / We reserve the right to make technical changes.

3

ACT20P-2CI-2CO-ILP-P

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030


32760 Detmold

Tel. +49 5231 14-0


Fax. +49 5231 14-2083

Drawings

Connection diagram

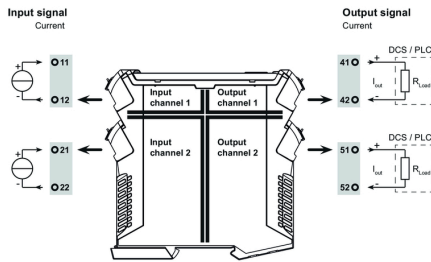

Dimensioned drawing info@weidmueller.com

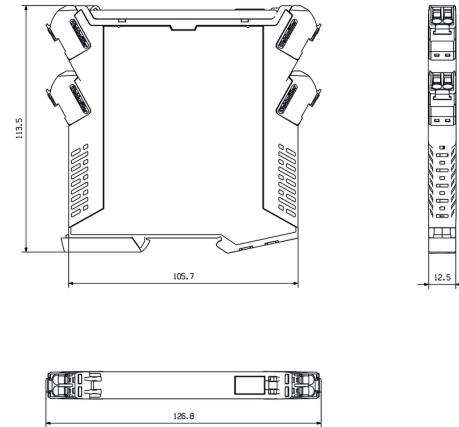

PUSH IN technology

